






CAPACITANCE	CAPACITANCE CODE	VOLTAGE CODE 16 160 VDC/100 VAC		
		W	H	L
0.01 $\mu\text{F}$	- 310	5.5	7.0	7.5
0.015 $\mu\text{F}$	- 315	5.5	7.0	7.5
0.022 $\mu\text{F}$	- 322	5.5	7.0	7.5
0.033 $\mu\text{F}$	- 333	7.5	9.0	7.5
0.047 $\mu\text{F}$	- 347	7.5	9.0	7.5
0.068 $\mu\text{F}$	- 368	7.5	9.0	7.5
0.1 $\mu\text{F}$	- 410	9.0	11.0	7.5

Further C-values upon request


**RECOMMENDED PACKAGING**

LETTER CODE	TYPE OF PACKAGING	HEIGHT (H) (mm)	REEL DIAMETER (mm)	ORDERING CODE EXAMPLE	PCM 5
D	AMMO	16.5	S*	MKP 1837-322-162-D	X
G	AMMO	18.5	S*	MKP 1837-322-162-G	X
F	REEL	16.5	350	MKP 1837-322-162-F	X
W	REEL	18.5	350	MKP 1837-322-162-W	X
—	BULK	—	—	MKP 1837-322-162	X

\*S = box size 55 x 210 x 340mm (W x H x L)

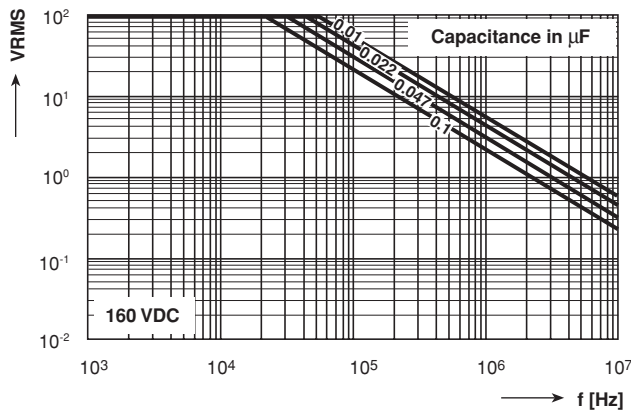

Permissible AC Voltage versus Frequency

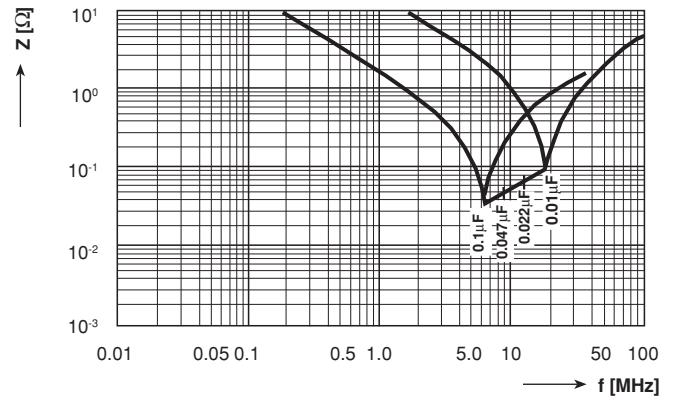

Impedance versus Frequency  $Z = f(f)$   
(Lead length 2.0mm)